

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER  
THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau

[WIPO]

[Bar Code]

(43) International Publication Date

August 11, 2005 (08/11/2005)

PCT

(10) International Publication Number

WO 2005/073570 A1

(51) International Patent Classification<sup>7</sup>: F16B 39/02  
39/38, 39/286

CO. KG [DE/DE]; Alleenstr. 41, 73730 Esslingen  
(DE).

(21) International Application No.: PCT/EP2004/009943

(72) Inventor; and

(22) International Filing Date:  
September 7, 2004 (09/07/2004)

(75) Inventor/Applicant (US only): METZGER, Heinz  
[DE/DE]; Bodelshoferweg 35, 73230 Kirchheim  
(DE).

(25) Language in which the international application was  
originally filed: German

(74) Representative: BARTELS AND PARTNER; Lange  
Strasse 51, 70174 Stuttgart (DE).

(26) Language in which the international application is  
published: German


(81) Designated States (unless stated otherwise, for each  
available type of national protective right): AE, AG,  
AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,  
CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE,  
EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL,  
IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT,  
LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI,

(30) Priority Data:  
10 2004 003 183.5 January 22, 2004 (01/22/2004) DE

(71) Applicant (for all designated states except the US):  
SPIETH-MASCHINENELEMENTE GMBH &

[continued on next page]

(54) Title: THREADED RING

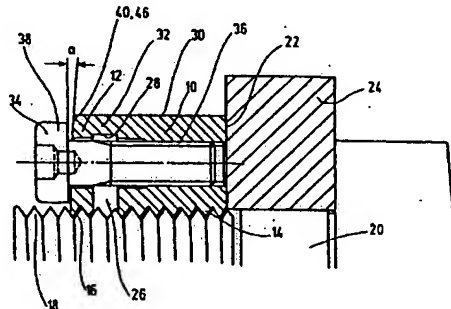

(57) Abstract: The invention relates to a threaded ring having a single-component body provided with an internal screw thread (14, 16) and consisting of two body parts (10, 12). The first part thereof (10) forms an adjusting ring having an end face (22) which is located on a radial plane, and the second body part thereof (12) forms a security ring which is connected to the first body part (10) by means of an elastically flexible wall part (32) of the body, forming a gap (26) between the two body parts (10, 12) and comprises an actuating device by means of which the geometry of the gap (26) can be adjusted due to the elastic flexibility of the wall element (29) along the longitudinal axis of the body. A bearing surface (46) comprising a predefinable inclination is arranged in the premounting state between parts of the actuating device and parts of the body and the inclination angle (a) in relation to the longitudinal axis of the body is selected in such a manner that in the mounting state, play occurring on the flanks of the screw thread is eliminated, enabling a high degree of efficiency to be obtained based on the force of the actuating device exerted on the inclined bearing surface and the thread flanks which are to be clamped.

(57) Zusammenfassung: Die Erfindung betrifft einen Gewindering, dessen mit einem Innengewinde (14, 16) versehener, einstückiger Körper mindestens zwei Körperteile (10, 12) aufweist, deren erster (10) einen Stellring mit einer endseitigen, in einer Radialebene liegenden Planfläche (22) bildet und deren zweiter Körperteil (12) einen Sicherungsring bildet, der mit dem ersten Körperteil

[Fortsetzung auf der nächsten Seite]

WO 2005/073570 A1

NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

TR), OAPI Patent (BF, BJ, CR, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

- (84) Designated States (*unless stated otherwise, for each available type of regional protective right*): ARIPO Patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian Patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European Patent (AT, BE, GB, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,

**Published:**

— *With International Search Report..*

*Reference is made for an explanation of the two-letter codes and the other abbreviations to the Guidance Notes on Codes and Abbreviations in the front section of each regular PCT Gazette edition.*